


# LADDERS

## 60 DEGREE STANDARD ANGLE SAF-T™ LADDERS

GILLIS-JARKE by  
**SPG**

ITEM # _____	MODEL # _____	QTY: _____
PROJECT: _____		
OPTIONS: <input type="checkbox"/> YES _____ <input type="checkbox"/> NO _____		

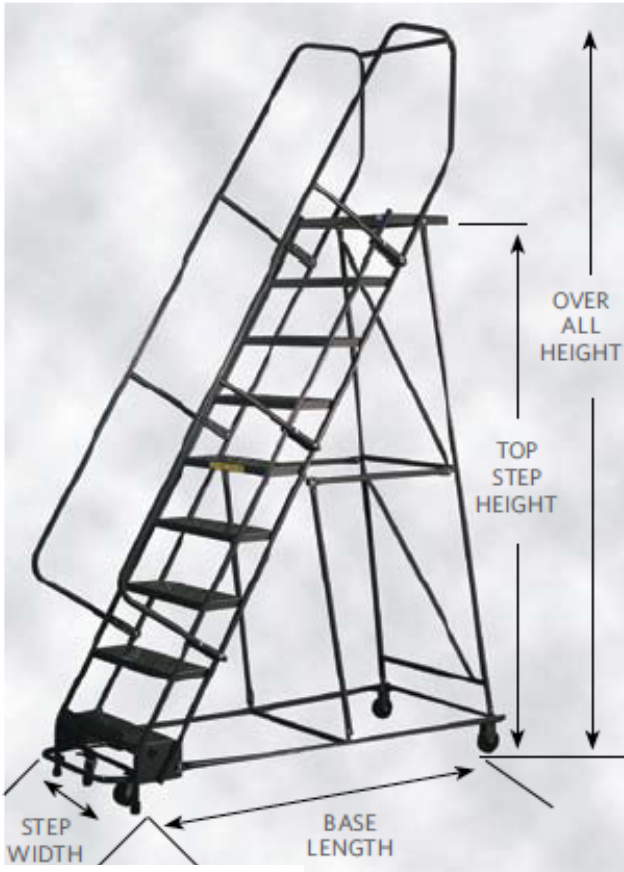

### Standard Features & Benefits

- ◆ Safety grating for surest footing when area is slippery or not clean
- ◆ Perforated steel tread for normal use where liquids are not present
- ◆ Retracting spring loaded casters with steel reinforced rubber tip feet (for 2-5 step ladders)
- ◆ Positive SAF-T lock with release secures ladder when an individual steps on the first step triggering the release bar (for 2-16 step ladders)

Tread Styles:

G-Strut



G-Perf



Spring Loaded Casters



SAF-T Lock:  
Caster carriage retracts allowing metal reinforced rubber-tipped feet to grip floor. Step on U-Tube bar and ladder becomes mobile on easy-roll plastic wheels.



60° Standard Angle

For SPG's complete product menu, visit [www.spgusa.com](http://www.spgusa.com) or call 877.503.4SPG (4774)

EXPECT MORE  
**SPG**  
STORAGE PRODUCTS GROUP

# LADDERS

## 60 DEGREE STANDARD ANGLE SAF-T™ LADDERS

Step Width 16"							Step Width 24"				Step Width 30"			
No.	Plat.	O.A.	G-Strut	G-Perf	Base	Wt./Ship	G-Strut	G-Perf	Base	Wt./Ship	G-Strut	G-Perf	Base	Wt./Ship
Steps	Ht. (In.)	Ht.	Model No.	Model No.	W x L (In.)	Wt. (Lbs.)	Model No.	Model No.	W x L (In.)	Wt. (Lbs.)	Model No.	Model No.	W x L (In.)	Wt. (Lbs.)
<b>No Handrail - All Welded (set-up) 4-2" Retractable Spring Casters</b>														
1	12	12	S1N1*	P1N1*	19½ x 16¼	19	S1N2*	P1N2*	26 x 18	24	—	—	—	—
2	20	20	S2N1*	P2N1*	22 x 24	25	S2N2*	P2N2*	30 x 24	30	S2N3	P2N3	33 x 24	34
3	30	30	S3N1	P3N1	22 x 32	31	S3N2	P3N2	30 x 32	40	S3N3	P3N3	33 x 32	44
4	40	40	S4N1	P4N1	22 x 37	37	S4N2	P4N2	30 x 37	50	S4N3	P4N3	33 x 37	54
<b>With Handrail - All Welded (set-up) 4-2" Retractable Spring Casters</b>														
2	20	53	S2R1	P2R1	22 x 24	33	S2R2	P2R2	30 x 24	43	S2R3	P2R3	33 x 24	47
3	30	63	S3R1	P3R1	22 x 32	41	S3R2	P3R2	30 x 32	48	S3R3	P3R3	33 x 32	59
4	40	73	S4R1	P4R1	22 x 37	53	S4R2	P4R2	30 x 37	62	S4R3	P4R3	33 x 37	67
5	50	83	S5R1	P5R1	22 x 44	62/142	S5R2	P5R2	30 x 44	70/150	S5R3	P5R3	33 x 44	75/171
<b>With Handrail - Knocked Down (KD) SAF-T Lock System 4-4" Casters - Below must ship crated.</b>														
6	60	93	S6R1**	P6R1**	28 x 55	95/175	S6R2	P6R2	32 x 55	109/189	S6R3	P6R3	36 x 55	119/215
7	70	103	S7R1**	P7R1**	28 x 62	104/201	S7R2	P7R2	32 x 62	121/218	S7R3	P7R3	36 x 62	130/247
8	80	113	—	—	—	—	S8R2	P8R2	32 x 68	130/214	S8R3	P8R3	36 x 68	142/259
9	90	123	—	—	—	—	S9R2	P9R2	32 x 76	148/250	S9R3	P9R3	36 x 76	164/289
10	100	133	—	—	—	—	S10R2	P10R2	32 x 82	164/266	S10R3	P10R3	36 x 82	182/307
11	110	143	—	—	—	—	S11R2	P11R2	32 x 90	177/286	S11R3	P11R3	36 x 90	201/333
12	120	153	—	—	—	—	S12R2	P12R2	32 x 96	209/368	S12R3	P12R3	36 x 96	223/382
13	130	173	—	—	—	—	S13R2	P13R2	40 x 103	220/379	S13R3	P13R3	40 x 103	236/395
14	140	183	—	—	—	—	S14R2	P14R2	40 x 108	233/398	S14R3	P14R3	40 x 108	248/413
15	150	193	—	—	—	—	S15R2	P15R2	40 x 115	242/407	S15R3	P15R3	40 x 115	264/429
16	160	203	—	—	—	—	S16R2	P16R2	40 x 121	255/420	S16R3	P16R3	40 x 121	282/447

\*Ships UPS boxed

\*\*SAF-T Lock has single wheel

Note: Overall height is platform height plus hand rail height.

AMCO • Freestyle • ISS • Kelmax • LPI • Universal Stainless • Gillis-Jarke

SPG International, LLC  
11230 Harland Drive NE  
Covington, GA 30014  
877-503-4SPG (4774)

www.spgusa.com

The best names in the business  
all have one thing in common.

EXPECT MORE

**SPG**

STORAGE PRODUCTS GROUP